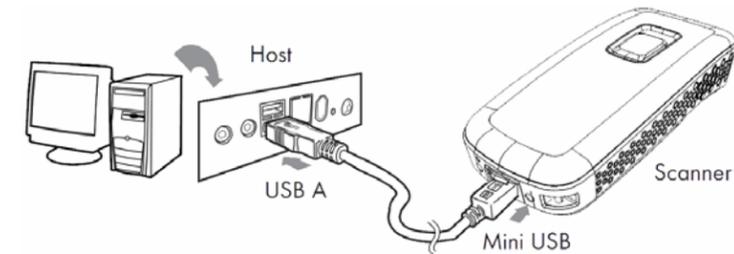# MS920 QUICK START GUIDE

unitech

The Unitech MS920 2D Pocket Scanner

SETUP AND PAIRING

The following steps will help you pair the MS920 to a host device.

STEP 1: CONNECT AND CHARGE

1. Flip the rubber cover up to expose the micro USB port on the scanner.
2. Plug the micro USB cable into the port on the scanner and into a free USB port of a host computer. Charge for 4 hours.

STEP 2: BEGIN PAIRING

Factory Default

Scan here to begin pairing the MS920 to a host device. **Note**: This factory default barcode will return your scanner to its original factory settings, a useful feature for troubleshooting purposes.

STEP 3: HID MODE

Bluetooth Mode: HID

Scan here to continue the pairing process between your mobile device and the MS920.

STEP 4: ENABLE BLUETOOTH ON HOST

Go to your host device (phone/tablet/computer) settings and turn on the Bluetooth function.

The MS920 will appear on your device as "Wireless Scanner" or "Unitech BT"

Select/Press "Wireless Scanner"

If you have Bluetooth 2.1, "Wireless Scanner" will now appear as paired. Your host device is now paired with the MS920.

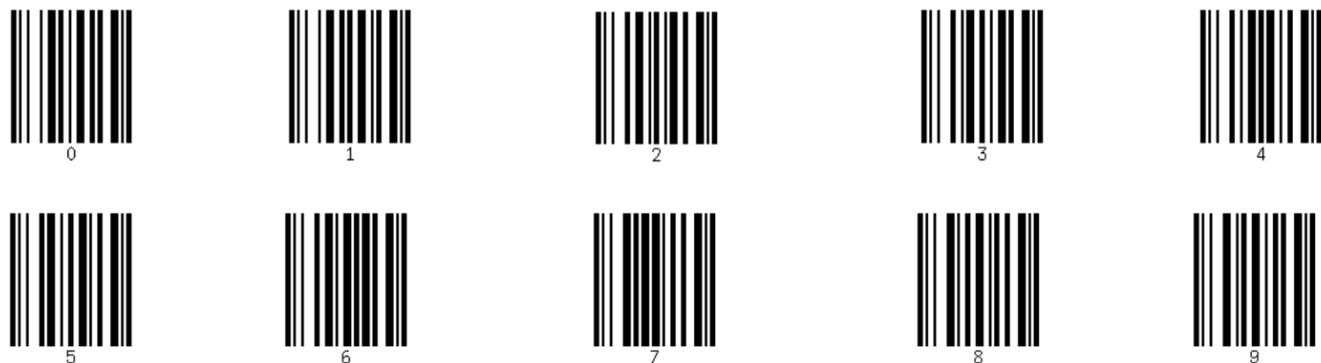*If your device does not pair automatically and you are prompted to enter a pincode, proceed to step 5*

STEP 5: PINCODE START

Pincode Start

Scan to indicate the beginning of the pincode sequence.

STEP 6: NUMERIC BARCODES

0   1   2   3   4

5   6   7   8   9

Scan the pincode sequence provided by your device using these barcodes.

STEP 7: ENTER BARCODE

Enter

Scan to indicate the end of the pincode sequence. Your device is now paired with the MS920.

TEST & FINISH

Open a word processing program or app such as Microsoft Word or Notepad on your host. Now scan the following barcode:

If the word "Unitech" appears on the screen you have succesfully installed your scanner. Congratulations!

SETTINGS AND CONFIGURATION

The following section covers the most common configuration settings for your MS920 scanner.

For additional configuration options please visit unitechscanners.com/MS920 and select the "Download" tab. You will find the User's Manual and a variety of other resources.

SWITCH TO BATCH MODE

Enable Batch

Scan here to switch from Bluetooth Mode to Batch Mode. Data will now be stored in the internal memory of the MS920 and the MS920 will no longer transmit data via Bluetooth.

TRANSFER DATA

Transfer Data

Scan here to send data from the MS920 to your host device after collecting the data in Batch Mode.

SWITCH TO BLUETOOTH MODE

Bluetooth Mode

Scan here to switch back to Bluetooth Mode. You can now pair the MS920 with a host.

DELETE DATA

1

2

Scan these barcodes if you wish to erase the data stored on your MS920. Please keep in mind that this process is irreversible.

KEYBOARD TOGGLE

You can bring up the keyboard on Apple iPhones using the MS920.

Simply double tap the scan button on your MS920.

Double tap the scan button once again to hide the keyboard.

HOW CAN WE HELP YOU?

The MS920 should be recognized as a generic HID device by your host device, similar to a standard keyboard. This allows you to scan into any field that you could normally type into.

Unitech's professional support team is available to quickly answer questions or technical-related issues. Should equipment issues occur, please contact a Unitech Service Representative at (800) 861-8648 for more information.